


J-GUARD EDGE

PROTECTION SYSTEM

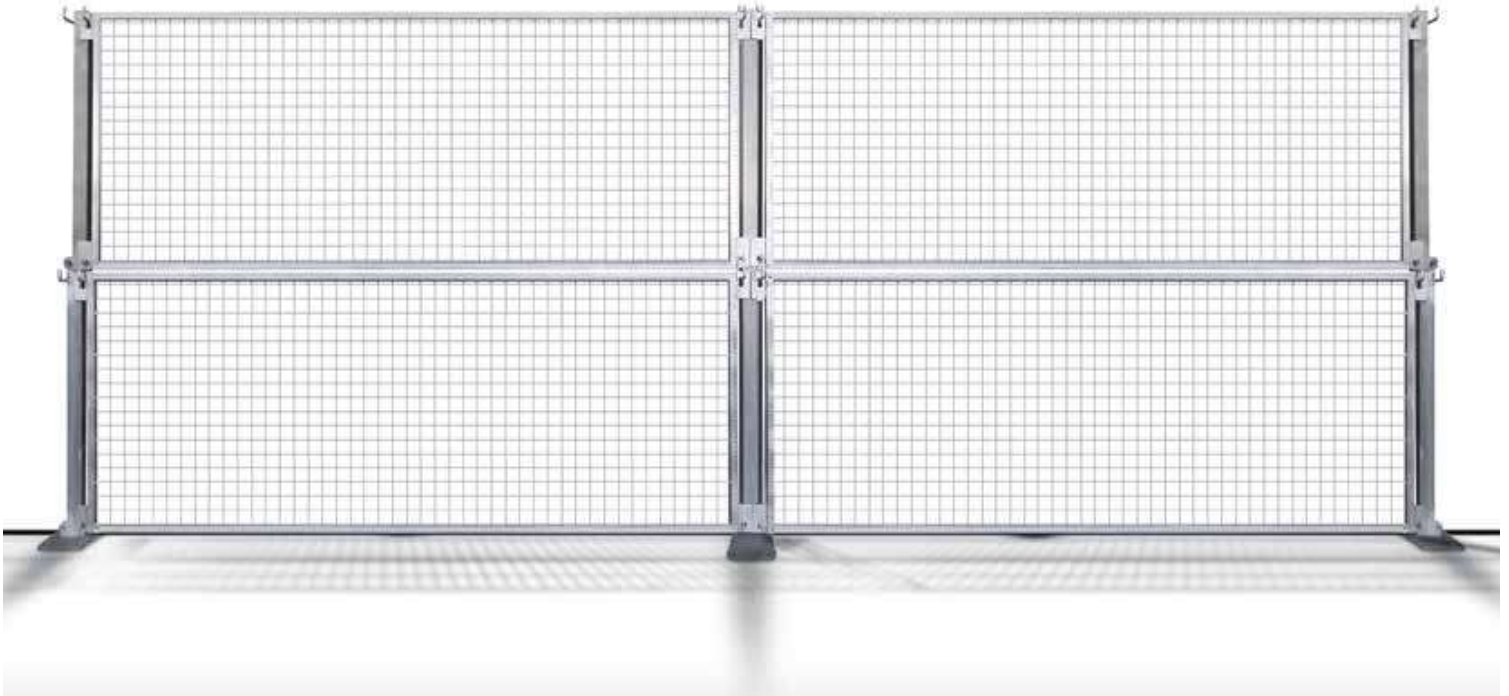

The new J-Guard Edge Protection System from Jaybro is a temporary modular edge protection system that provides the protection you need when working near exposed edges on site.

Features

- Completely modular and flexible to suit your individual needs
- Quick and easy installation – does not require a certified installer
- Provides a 940mm high protective barrier at single row, and 1880mm high at double row around the perimeter of the site
- Requires 12mm x 80mm screwbolts
- Heavy duty galvanised steel components can withstand harsh weather
- Compact packaging for streamlined freight and delivery to site
- Easy to dismantle for re-use on the next project

Applications


- Concrete slab and formwork edges
- At the edges of pits and excavations
- Multideck and high-rise construction edges
- Edges of mezzanine floors and landings
- Around openings in floors or roof structures
- Along walkways, stairways or ramps
- Areas where floor heights differ significantly
- Additional protection when working at height

Approvals

- Tested, approved and complies to AS/NZS 4994 Standards – Temporary Edge Protection

J-GUARD EDGE

PROTECTION SYSTEM

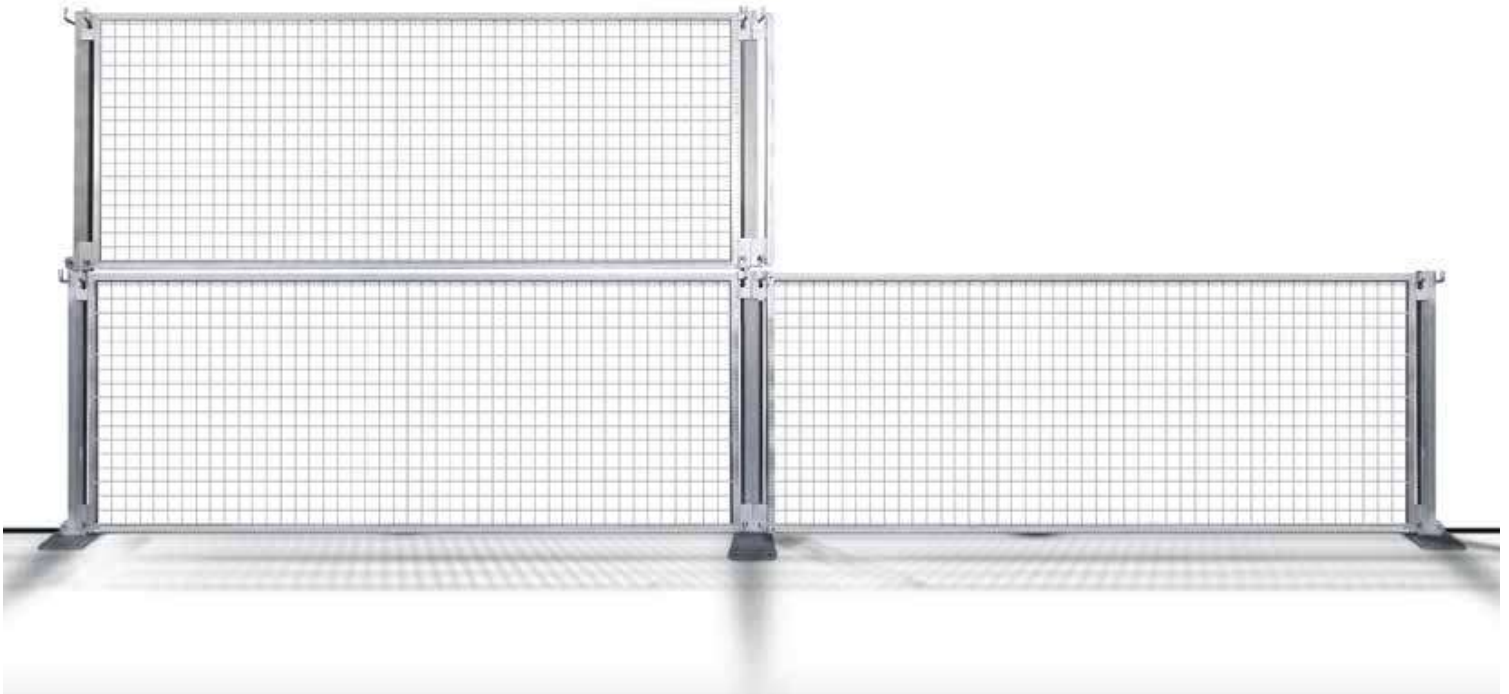

Dimensions

J-Guard Panel

- Mesh insert panels measure 2400 x 920mm high
- 50 x 50mm galvanised steel mesh

J-Guard Post

- 940mm high galvanised steel square posts with 150 x 250 x 10mm steel base plate

J-Guard Side Mount Post

- 940mm high galvanised steel square posts for height extension

J-GUARD PANEL:

CODE 07-JG2300

J-GUARD POST:


CODE 07-JGPOST

J-GUARD SIDE MOUNT POST:

CODE 07-JGSM

SCREW BOLT: (12mm x 80mm)

CODE 40-PBT1280-PWR

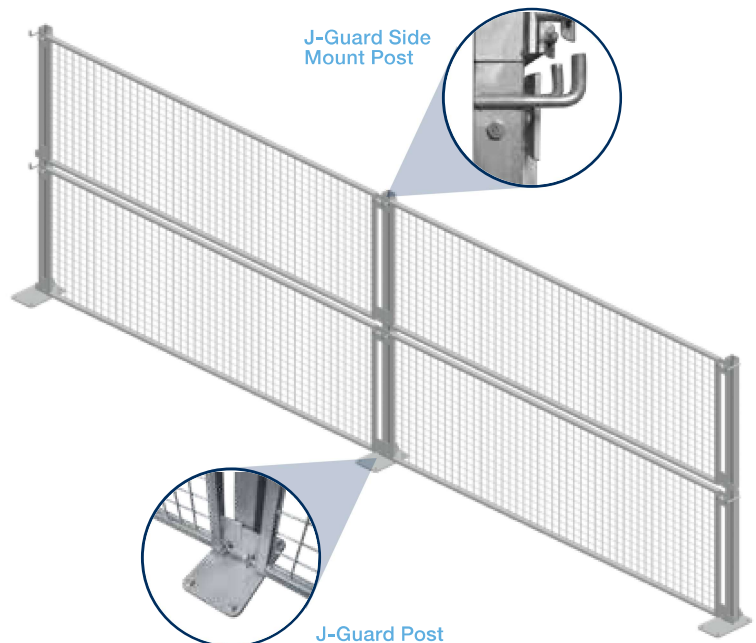

Blue-Tip Screw Bolt
(12mm x 80mm, Zinc)